
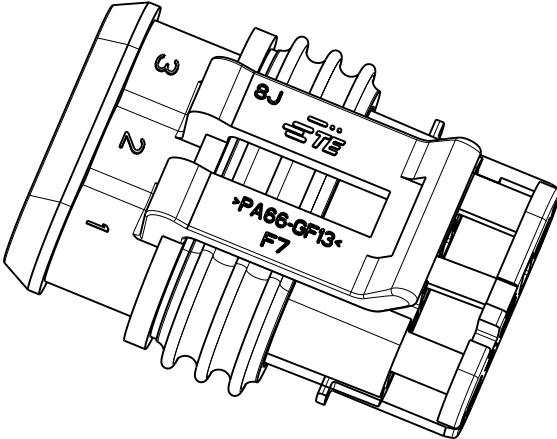
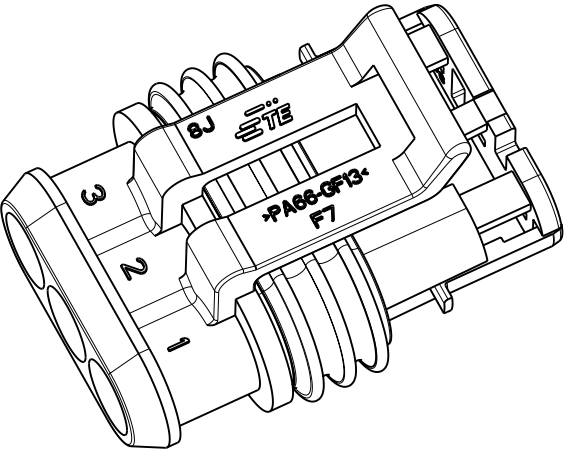
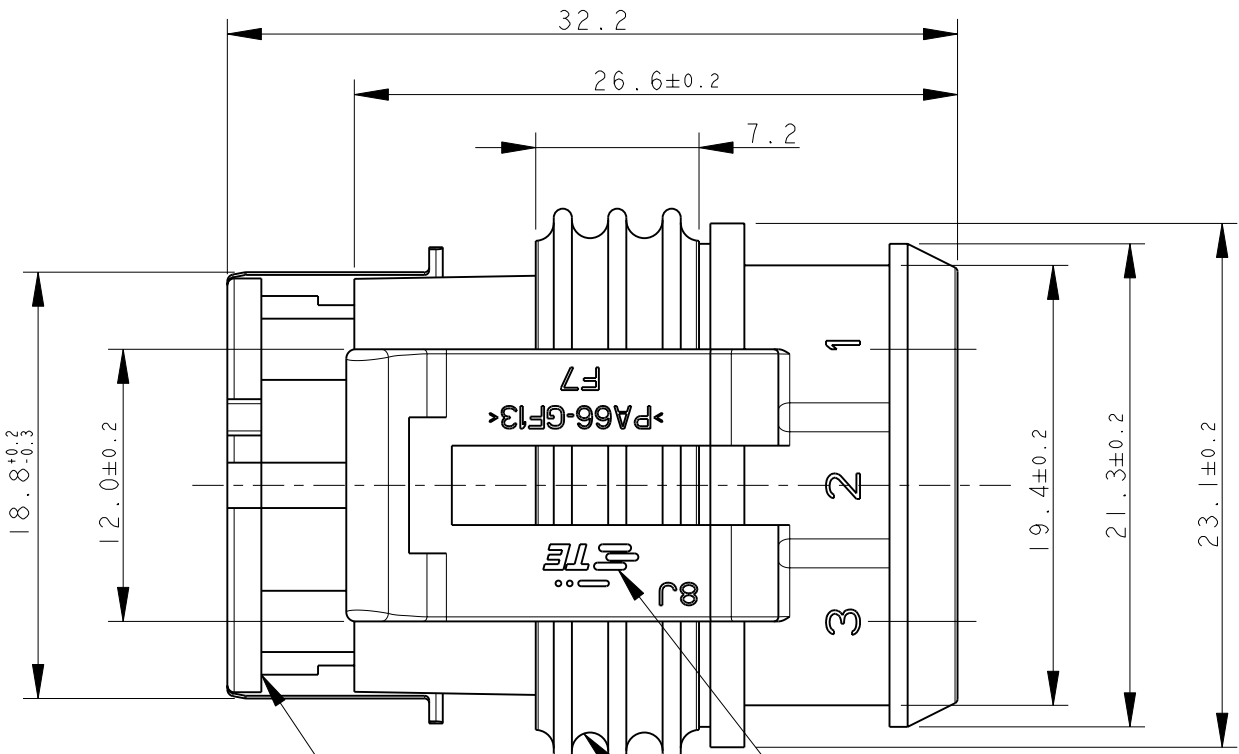
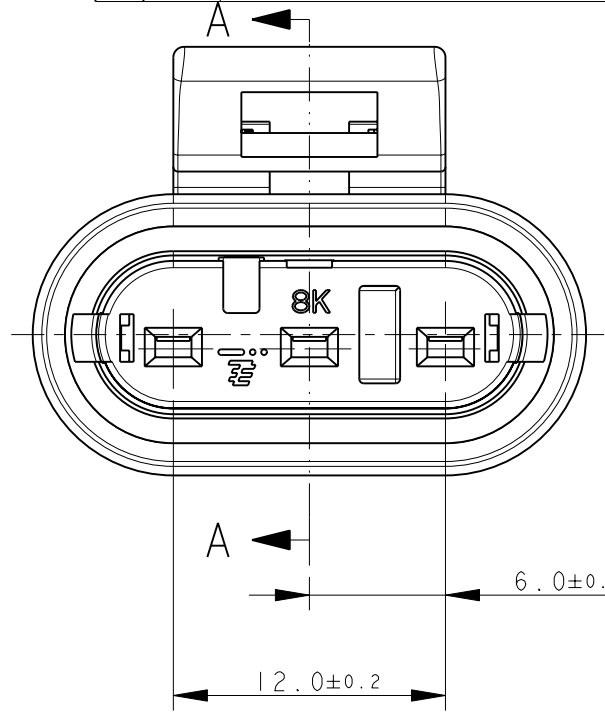


2		1				
LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	B4	REVISED PER ECO-11-005033		02APR2011	RK	HMR
	B5	REVISED BY ECR-11-024280		13DEC2011	M.F.	M.G.

SECTION A - A

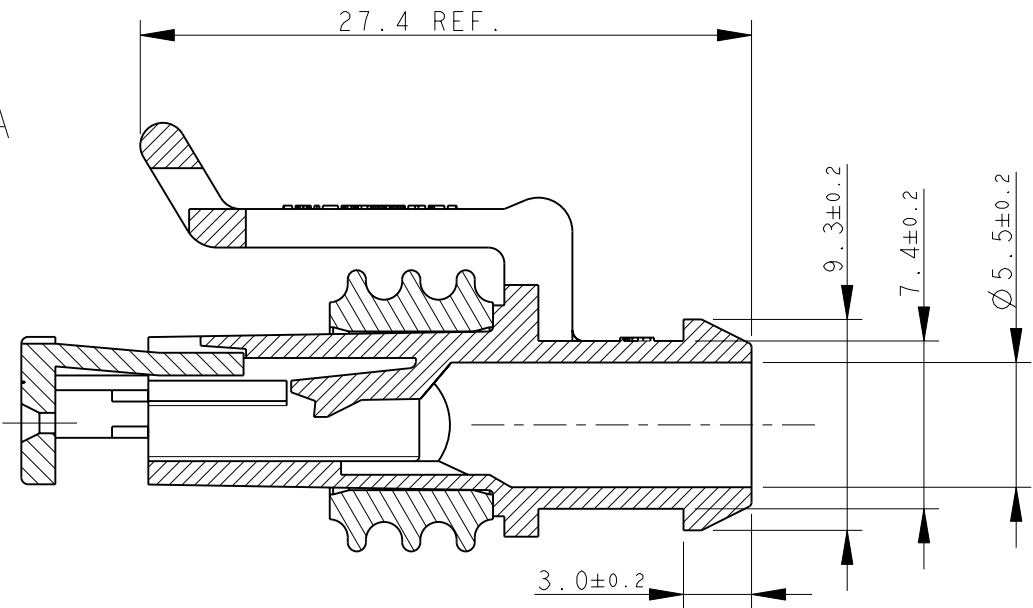

1) FOR COUNTERPART DETAILS, SEE SHEET 2 OF 2

GRAY	PA66-GF	282087-2
BLACK	PA66-GF	282087-1
FINISH/COLOR	MATERIAL	PART NUMBER

TE CONNECTIVITY TRADE MARK
(IN ALTERNATIVE: "AMP" LOGO OR "Tyco Electronics" LOGO)

SEALING
(SILICONE RUBBER)

PRE-ASSEMBLED SECONDARY LOCK
(RED COLOR)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.3

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±2°

FINISH -

DWN
C. BERTINI
07-1990

CHK
A. BRUNI
07-1990

APVD
-

PRODUCT SPEC
108-20090

APPLICATION SPEC
412-20000

WEIGHT
3.65gr

CUSTOMER DRAWING

NAME

AMP SUPERSEAL 1.5 SRS.
3 POSITIONS PLUG ASS'Y

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-282087

RESTRICTED TO
-

SCALE
-

SHEET
1

OF
2

REV
B5