
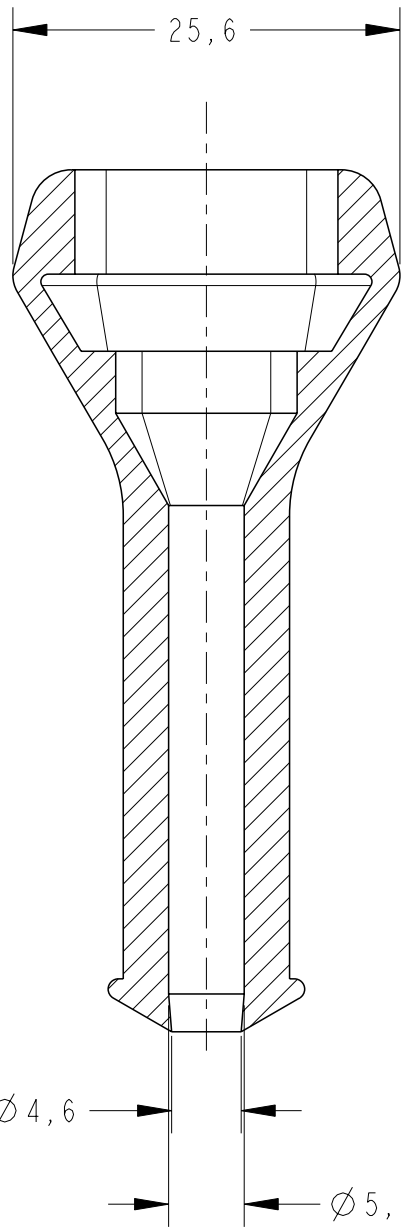


LOC	DIST	REVISIONS					
AP	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
 ProENGINEER WILDFIRE 4.0 <i>DO NOT REVISE</i> <i>EXCEPT BY CAD</i>		DI	OBSOLETE DASH I	ECO-13-006169	09APR2013	NCL	DAO

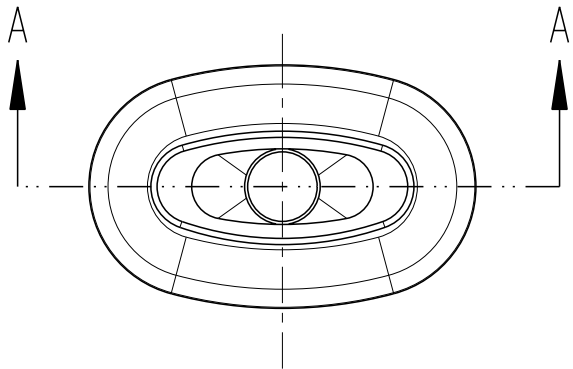

Ø 4,6


SECTION A - A

Ø 5,0

- 1 - ELASTÔMERO SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 2 - ELASTÔMERO SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 3 - ELASTOMERO SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = EXTERNAMENTE LUBRIFICADO 2%

- 1 - ELASTOMER SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 2 - ELASTOMER SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 3 - ELASTOMER SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = 2% LUBRIFICATED EXTERNALY

OBSOLETE	PRETO/BLACK	40±5 SHORE A	SILICON 3	880811-3
	PRETO/BLACK	40±5 SHORE A	ELASTOMER 1	880811-2
	PRETO/BLACK	50±5 SHORE A	ELASTOMER 2	880811-1
	FINISH	HARDNESS	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.L. OGAWA 10JUN99	 TE Connectivity		
		CHK P.L.FARIA 10JUN99			
DIMENSIONS: mm		APVD J.M.M.NETO 10JUN99	NAME - COVER CAP 3 POSN -		
		PRODUCT SPEC -			
		APPLICATION SPEC -			
MATERIAL SEE TABLE		WEIGHT -	SIZE A3	CAGE CODE 00779	RESTRICTED TO -
		FINISH SEE TABLE	DRAWING NO C-880811		
CUSTOMER DRAWING			SCALE 2:1	SHEET 1	REV DI