

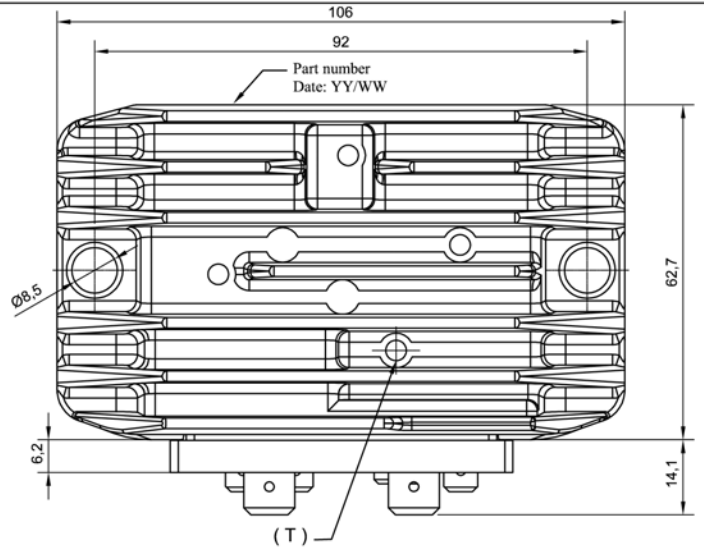
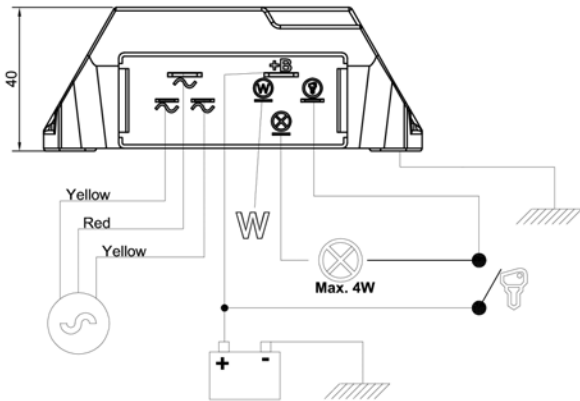




FEATURES

VREG= 14,2 ±0,2V (I <2Amp.)
I max. 30A.
Max. AV switching key w.r.t. battery ±0,1 V
W.L.= Led or bulb max. 4W
Voltage transients protection
Short circuit protection (Max 0,4A)
Shutdown <850 rpm
W= Frequency signal $f=(N^{\circ}\text{poles} \times \text{RPM})/120$
Regulator case ground contact must be guaranteed (>30A)
Max temperatures in (T)
With load 95°C
Non operation 110°C

2		
1		
Num.	Date	Alteration designation
OPS REGULATOR 12V		7155
Date 07/ 11 / 11	Drawing: Ignasi	Scale:
COPIA NO CONTROLADA		

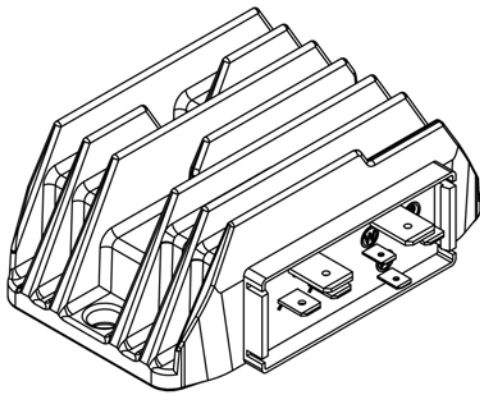

AETSA
www.aetsa.com
saprisa@aetsa.com
+34 933 072 400