
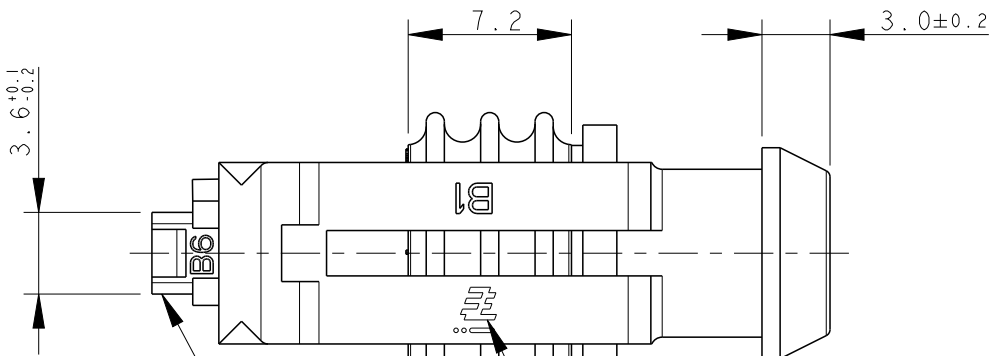
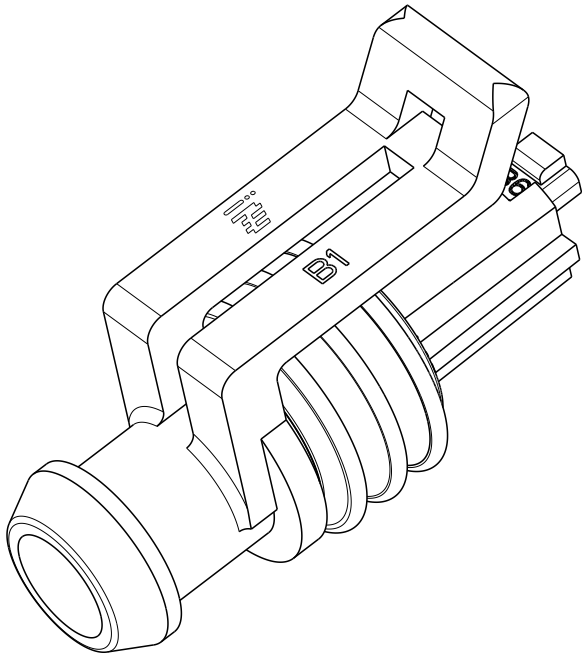
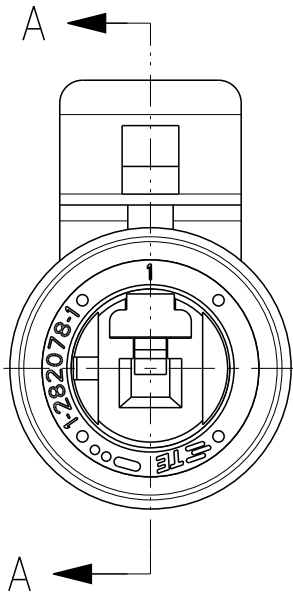


LOC 	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C I	REVISED FOR ET00-0008-04	20JAN2004	P. Z.	R. M.
			F	REVISED BY ECR-11-024280	13DEC2011	M. F.	M. G.
			F I	ADDED PN 2-..-2 (ECR-13-002497)	20FEB2013	M. G.	M. G.

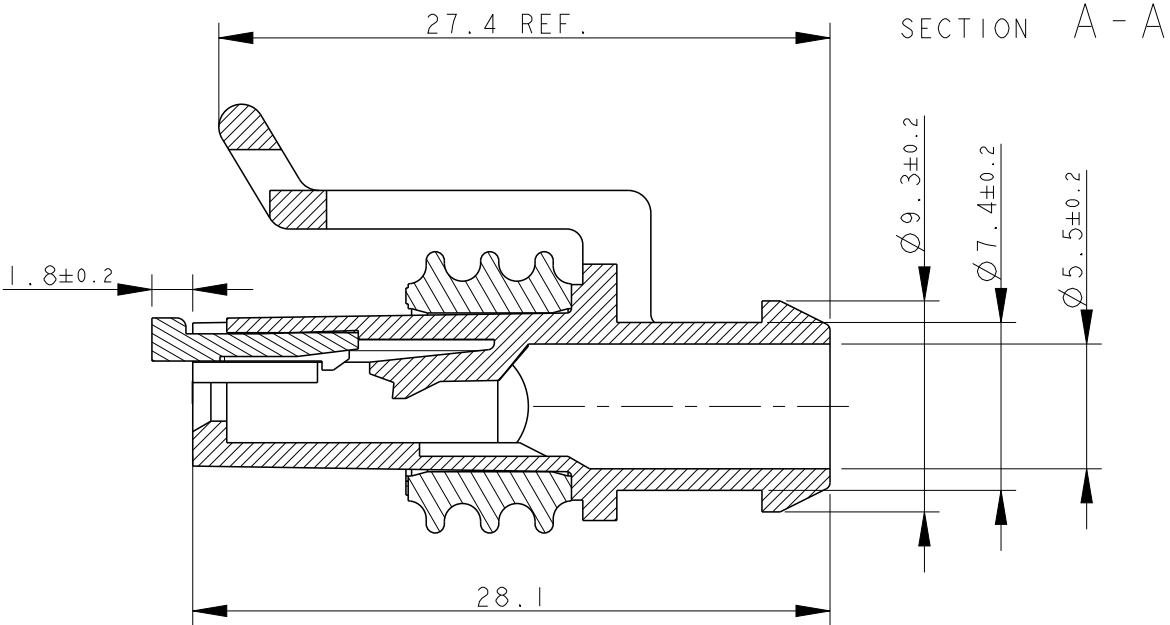


TE CONNECTIVITY TRADE MARK,
(IN ALTERNATIVE: "AMP" LOGO, OR "Tyco Electronics" LOGO)

SEALING
(SILICONE RUBBER)


PRE-ASSEMBLED SECONDARY LOCK
(RED COLOR)

⚠ WARNING: LOW RETENTION FORCE OF SEALING ON HOUSING (<9N)
2) FOR COUNTERPART DETAILS, SEE SHEET 2 OF 2

P/N 1-282079-2 - REDUCED LANCE PROFILE

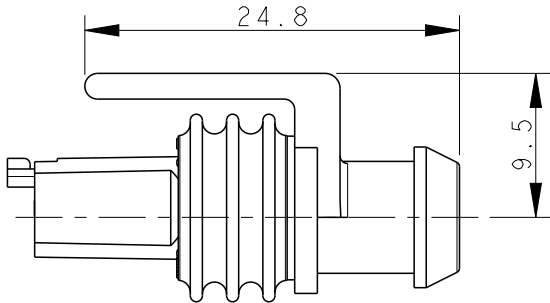

SCALE 2:1

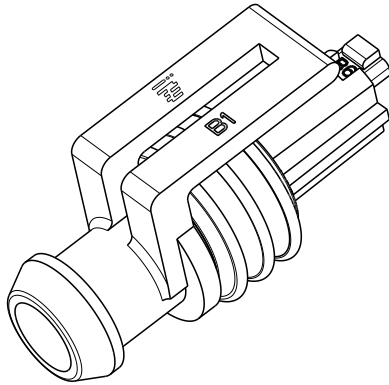

⚠	HOUSING: BLACK SEALING: NATURAL	HOUSING+SEC.LOCK: PA 66-GF SEALING: LSR (4% OIL CONTENT)	2-282079-2
	HOUSING: BLACK SEALING: YELLOW		1-282079-2
	HOUSING: GRAY SEALING: YELLOW	HOUSING+SEC.LOCK: PA 66-GF SEALING: LSR (NO OIL CONTENT)	282079-3
	HOUSING: BLACK SEALING: YELLOW		282079-2
NOTE	FINISH/COLOR	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±°
	1 PLC ±0.3
	2 PLC ±°
	3 PLC ±°
	4 PLC ±°
ANGLES	±2°
MATERIAL	FINISH

DWN	C. BERTINI	05-1992
CHK	A. BRUNI	05-1992
APVD	-	-
PRODUCT SPEC	108-20090	
APPLICATION SPEC	412-20000	
WEIGHT	1.55gr	



TE Connectivity

AMP SUPERSEAL 1.5 SRS.
1 POSITION PLUG ASS'Y

SIZE 300779 CAGE CODE 282079

Customer Drawing

SCALE 3:1

SHEET 1 OF 2

REV F1