



# FIXED CALIPER

P 32 G

20.6950.11



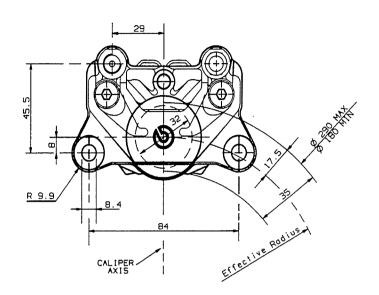


#### DESCRIPTION

Fixed caliper with 2 opposed pistons, realized by semicalipers joined by bolts. Pads are supported by one pin. Construction Material: Aluminium Alloy. Operating fluid: broke fluid DOT4.

N.B.: drawing shows caliper Code 20.6950.11 Caliper Code 20.6950.21 specular.

### PADS SHAPE AND DIMENSIONS



LAST UPDATE: 20/09/1996

## TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2

32 mm

Average pad surface (1 pad):

16.1 cm<sup>2</sup>

MAX working pressure: A) Disc position (TOLERANCE):

70bar ±0.6 mm

Weight (with not sintered pods):

0.600 Kg

#### CONFIGURATION

CODE CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.6950.11	FERIT I/D 450 FF	GOLD	SX DX	4.0 mm	7.0 cm³

## AVAILABLE SPARE PARTS

CODE PARTS CALIPER	PADS	BLEEDER SCREW	DUST COVER	PIN
20.6950.11	107.6949.11	105.3246.21	105.1502.10	120.5116.11